



FrymaKoruma Vacuum-Deaerator VE I


Continuous deaeration for outstanding product quality

Unbeatable batch times at perfect product quality

The FrymaKoruma Vacuum Deaerator is the perfect solution for eliminating included air in all kind of semi solid and liquid products. The product containing the air or gas pockets is distributed in a thin layer on a centrifugal disc with a sieve. Is it then sprinkled into the vessel by means of a screening frame. The air and gas pockets expand under vacuum, causing the bubbles to burst and the liberated pockets to be exhausted by the vacuum pump.

Key Benefits:

- ◆ extremely efficient deaeration
- ◆ optimally adaptable to any product
- ◆ CIP and SIP-capable
- ◆ easy to operate and clean

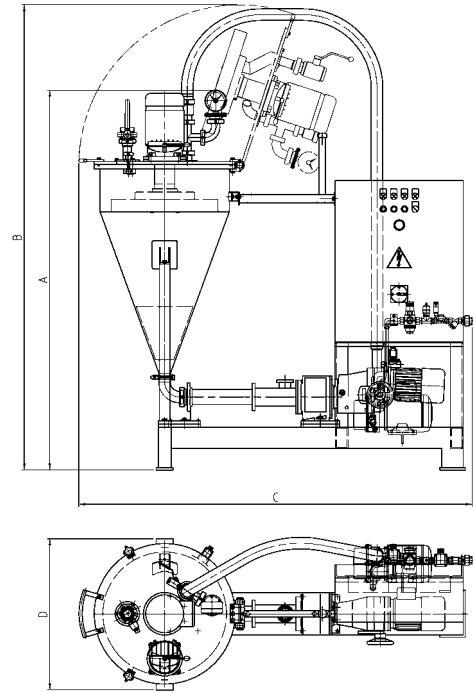

A Unit of Robbins & Myers, Inc.

Processing vessel	useful volume 25 l	total volume 58 l		
Inlet	DN 32	DIN 11851		
Throughput	300 – 1500 kg/h			
Thin-layer distributor	0,75 kW	1500 rpm / 50 Hz		
Discharge pump	0,75 kW	109 – 612 rpm / 50 Hz		
Outlet	DN 32	DIN 11851		
Vacuum pump	0,75 kW			
Dimensions (approx.) [mm]	A = 1630	B = 1740	C = 1650	D = 540
Weight (approx.) [kg]	475			

technical data subject to modification

© 2004 Romaco AG

FRY_4EN_VE_0001_1104

Processing Division • Romaco FrymaKoruma

FrymaKoruma GmbH • Fischerstrasse 13 • 79395 Neuenburg • Germany

Phone +49 (0)7631 7067 0 • Fax +49 (0)7631 7067 29 • frymakoruma@romaco.com • www.romaco.com