



# FrymaKoruma Vacuum-Deaerator VE II


Continuous deaeration for outstanding product quality

## Unbeatable batch times at perfect product quality

The FrymaKoruma Vacuum Deaerator is the perfect solution for eliminating included air in all kind of semi solid and liquid products. The product containing the air or gas pockets is distributed in a thin layer on a centrifugal disc with a sieve. Is it then sprinkled into the vessel by means of a screening frame. The air and gas pockets expand under vacuum, causing the bubbles to burst and the liberated pockets to be exhausted by the vacuum pump.

### Key Benefits:

- ◆ extremely efficient deaeration
- ◆ optimally adaptable to any product
- ◆ CIP and SIP-capable
- ◆ easy to operate and clean

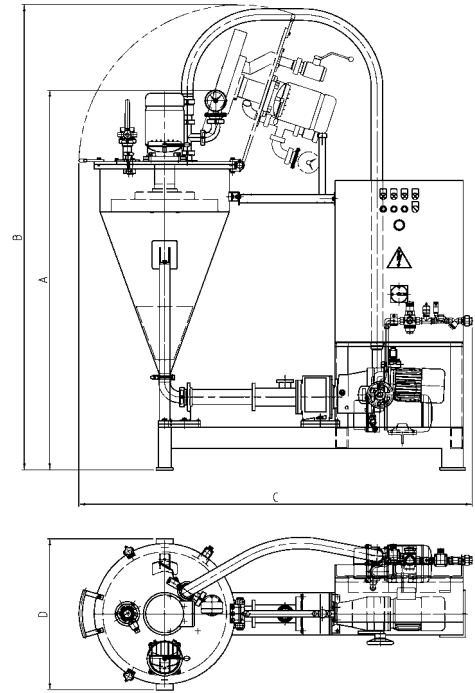

A Unit of Robbins & Myers, Inc.

Processing vessel	useful volume 65 l	total volume 140 l		
Inlet	DN 40	DIN 11851		
Throughput	800 – 4000 kg/h			
Thin-layer distributor	1,5 kW	1500 rpm / 50 Hz		
Discharge pump	1,5 kW	150 – 530 rpm / 50 Hz		
Outlet	DN 50	DIN 11851		
Vacuum pump	1,5 kW			
Dimensions (approx.) [mm]	A = 1770	B = 2190	C = 1850	D = 710
Weight (approx.) [kg]	700			

technical data subject to modification

© 2004 Romaco AG

FRY\_4EN\_VE\_0002\_1104

Processing Division • Romaco FrymaKoruma

FrymaKoruma GmbH • Fischerstrasse 13 • 79395 Neuenburg • Germany

Phone +49 (0)7631 7067 0 • Fax +49 (0)7631 7067 29 • frymakoruma@romaco.com • www.romaco.com